



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

Pearson LED Flush Mount PEAF Series

Features

Contemporary flush mount features a simple and clean design with metal accents. Frosted white acrylic diffuser provides indirect lighting.

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

All metal parts are painted satin nickel or white.

Diffuser

.100" thick frosted white fabricated acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120VAC.

LED

Integrated LED modules capable of producing:
12" - 15W, 1400 source lumens
16" - 30W, 2400 source lumens
Adjustable choice 2700K, 3000K, or 3500K (CCT).
Rated for 50,000 Hrs. 90 CRI.


Certification

cETLus listed for damp locations.
Title 24 Compliant with 12" fixture.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions
subject to change without notice.**

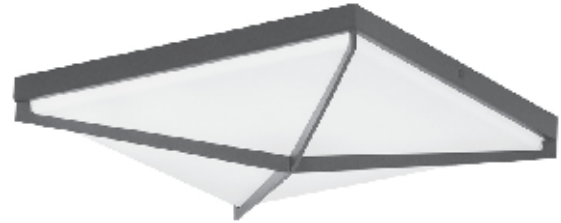

3in1 color
temperature
2700K/3000K/3500K

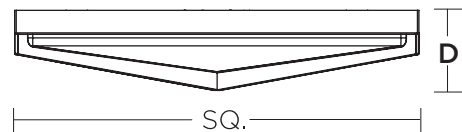

Ordering Information:

| White | Satin Nickel | LED | Source Lumens | Adjustable CCT | SQ. | D |
|-----------------|-----------------|-----|---------------|-------------------|-----|---------|
| PEAF1215LAJUDWH | PEAF1215LAJUDSN | 15W | 1400 | 2700K/3000K/3500K | 12" | 3-3/16" |
| PEAF1624LAJUDWH | PEAF1624LAJUDSN | 30W | 2400 | 2700K/3000K/3500K | 16" | 3-3/16" |