



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Alta LED Flush Mount AAF Series

Features

This low profile design provides a dramatic look and features an edge-lit light panel construction. Products can be used in various applications including corridors, bath, hallway, kitchen and anywhere general lighting is needed. Mounts to standard junction box (not included).

Construction

Housing is die-formed steel. Standard mounting holes and hardware included. Power supply connections must be made inside junction box (not included).

Finish

Choose from painted black/chrome or satin nickel/white finish combinations.

Diffuser

White acrylic.

Electrical

D1 Driver

Input 120 VAC, 60 Hz. The LED driver is dimmable with a 2-wire (TRIAC) or electronic low voltage (ELV) dimmer switch.

D2 Driver

Input 120-277 VAC 60 Hz. LED driver is dimmable 0-10V DC.

LED

Integrated LED modules capable of producing:
 12" - 17.5W, 1400 source lumens
 16" - 31W, 2600 source lumens
 3000K (CCT). Rated for 50,000 Hrs. 90 CRI.

Certification

cETLus listed for damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.


**Specifications and dimensions
subject to change without notice.**



Black/Chrome



Satin Nickel/White

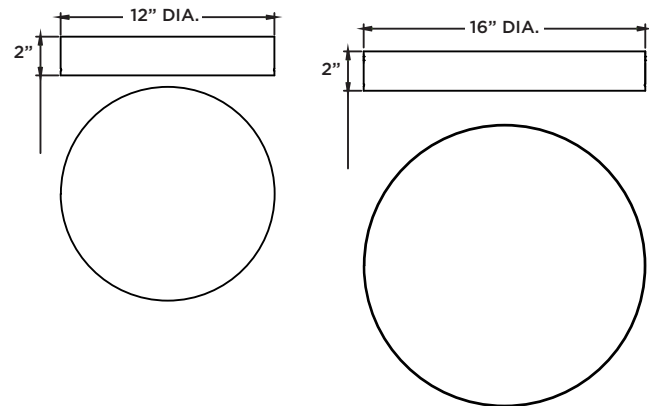

Ordering Information:

Black/Chrome	Satin Nickel/White	LED	Source Lumens	CCT	DIA.	D
AAF121400L30D1BKPC	AAF121400L30D1SNWH	17.5W	1400	3000K	12"	2"
AAF121400L30D2BKPC	AAF121400L30D2SNWH	17.5W	1400	3000K	12"	2"
AAF162600L30D1BKPC	AAF162600L30D1SNWH	31W	2600	3000K	16"	2"
AAF162600L30D2BKPC	AAF162600L30D2SNWH	31W	2600	3000K	16"	2"