



|                |  |              |
|----------------|--|--------------|
| LOCATION       |  | DATE         |
| PREPARED BY    |  | QUANTITY     |
| COMMENTS       |  | FIXTURE TYPE |
| CATALOG NUMBER |  |              |

## Sutton LED Flush Mount SUF Series

### Features

This Sutton LED flush mount is a shallow mushroom decorative style fixture providing beauty and light to any room. An excellent alternative solution to incandescent or CFL fixture with long lasting and energy saving LED technology. Ideal use for general lighting in indoor residential, commercial, and hospitality applications. Fixture must be mounted to a standard junction box (not included) on a ceiling. Available in multiple sizes.

### Construction

A 22-gauge steel housing made by stamping process and plated to provide a long lasting finish with 3 matching side screws to hold the diffuser. A hand blown glass diffuser is simply attached to the housing with the side screws. Power supply connections must be made inside a junction box (not included).

### Finish

Available in satin nickel.

### Diffuser

0.125" thick hand blown frosted white glass.

### Electrical

Input 120-277 VAC 60 Hz.  
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.  
TRIAC and ELV dimming only at 120VAC.

### LED

Integrated LED modules capable of producing:  
14" - 18W, 1400 source lumens  
17" - 30W, 2400 source lumens  
Adjustable Choice 3000K, 3500K, 4000K (CCT).  
Rated for 50,000 Hrs. 90 CRI.

### Certification

All fixtures are cETLus listed for indoor damp locations.


### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions**  
subject to change without notice.



**3in1** color temperature  
3000K/3500K/4000K

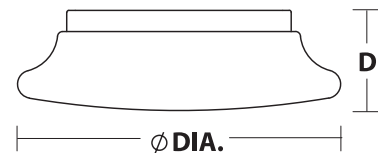

## Ordering Information:

| Satin Nickel   | LED | Source Lumens | Adjustable CCT    | DIA.    | D      |
|----------------|-----|---------------|-------------------|---------|--------|
| SUF1514LAJUDSN | 18W | 1400          | 3000K/3500K/4000K | 14-1/2" | 4-1/2" |
| SUF1824LAJUDSN | 30W | 2400          | 3000K/3500K/4000K | 17-1/2" | 4-3/4" |